

Mobrey

Vertical magnetic level switches

Data sheet
IP107

- Weatherproof
- Flameproof
- Direct mount
- Chamber mount
- Displacer controls



Operation

The float carries a stainless steel sheathed permanent magnet which rises and falls in the glandless pressure tube with changing liquid level.

A switch mechanism is mounted inside the enclosure adjacent to the pressure tube.

Switching is achieved with the unique Mobrey 'three-magnet' system, giving snap-action 'latch-on' switching.

Vertical movement of the float magnet in the pressure tube simultaneously actuates the secondary and tertiary magnets in the switch mechanism to operate the contacts. This 'three-magnet' system enables the float magnet to pass on and actuate switch mechanisms at other levels. Switch mechanisms already actuated cannot re-set until the return of the primary magnet actuates the magnet system once again.

- Unique 3 magnet latching switch mechanism
- No springs in switch mechanism

Contents

	<i>Page</i>
Introduction	3
Switch Mechanisms	4
1. Direct mount displacer controls	5-7
2. Direct mount float switches	8-9
3. Chamber mounted controls	
3.1 Carbon steel chambers	10-11
3.2 316L stainless steel chambers	12-13
4. Dimensional and operating level data	14
5. Technical data and options	15
6. Applications and users	16



Whether you require a switch for critical area applications or just general purpose control, the extensive range of Mobrey chambers ensures that we will always have a solution to your particular problem.

A choice of carbon steel chambers is available, or for more rigorous applications we supply a series of 316 stainless steel chambers. A variety of tank and process connections are available to make installation simple and economic. This gives you the choice to meet your application in keeping with your budget.

Introduction

Whether you require a switch for critical area applications or just general purpose control, the extensive range of Mobrey chambers ensures that we will always have a solution to your particular problem.

A choice of carbon steel chambers is available, or for more vigorous applications we supply a series of 316 stainless steel chambers. A variety of tank and process connections is available to make installation simple and economic. This gives you the choice to meet your application in keeping with your budget.

Mobrey vertical magnetic level switches for industrial and process control use have been available for over 20 years and have been steadily gaining a reputation for quality and reliability.

Based on the industry standard boiler water level controls these controls employ the same three magnet switch mechanism for snap-action latching switching.

The design of this unique switch mechanism overcomes all the inherent problems of mercury tubes and micro switches. Even under severe vibration conditions there are no springs to cause contact bounce, hover, or even failure. The snap action magnets give positive stable latching time after time after time.

There are two switching functions available : 2 x SPST (SPCO) switching or DPDT (DPCO) switching, and each comes in four variants :-

- General purpose use with silver cadmium oxide contacts for long life.
- Low power circuit used with gold plated contacts for use in low current/voltage applications such as I.S. circuits.
- High power circuits giving up to 10A switching capability.
- Hermetically sealed for the ultimate in reliability - sealed for life.

When controls are required to operate in extreme conditions, the unique Mobrey hermetically sealed switch provides dependable life long operation that you can rely on. With **all** its moving parts and contacts completely enclosed, this genuine

hermetically sealed switch is suitable for use in corrosive atmospheres and low temperature environments.

Features

- Unique switching mechanism
 - totally reliable
- No springs in switch mechanism
 - positive snap action switching
- Vibration resistant
 - eliminates spurious trips
- Multi-switching models
 - cost effective control
- Genuine hermetically sealed switch option - totally safe and secure
- Material certification to DIN 50049 3.1B
- Materials to ASTM and B.S. Standards

Approvals

Mobrey vertical controls are certified E Exd IIC T6 in accordance with BS5501 Part 5 (en50018).

BASEEFA certificate no. 90C1262


Flameproof models are available constructed in either aluminium alloy to keep weight to a minimum or cast iron for extended usage in arduous environments. Users must comply with installation details given in leaflet IP153.

Intrinsically Safe Use

For use in intrinsically safe circuits, gold plated switch contacts are recommended (see page 4). Users are reminded that it is their responsibility to obtain the necessary system approval and licences for such circuits.

BS5750 : Part 1

Solartron Mobrey Ltd has been assessed and approved by Lloyds

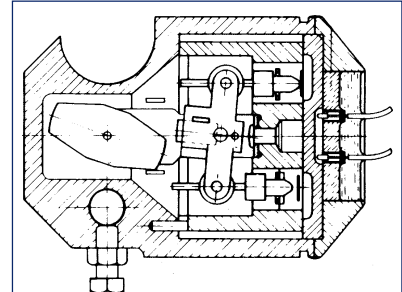

Section through type H4 switch mechanism





Hermetically sealed switch mechanism

Register Quality Assurance Ltd against BS5750 : Part 1: 1987 and ISO 9001 - 1987 EN 29001 - 1987 for the design, development and manufacture of electrical, mechanical and ultrasonic level measuring equipment.

Quality Assurance



With over 20 years worldwide experience in the major power, nuclear and petro-chemical industries, Solartron Mobrey is able to accommodate testing, surveying and documentation requirements as specified at the time of order. Inspection by customers or nominated inspection agencies can be arranged.

KDG Mobrey Switch Mechanisms

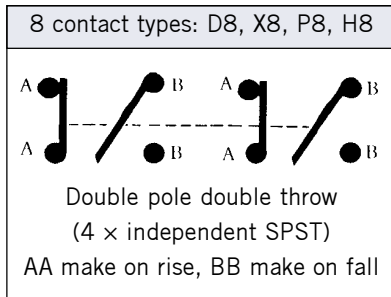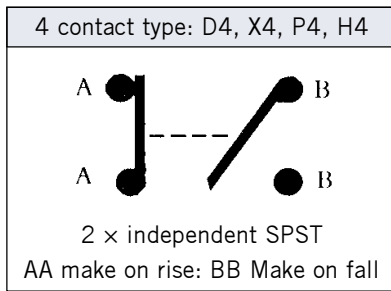

Note: For DPDT operation, installer must common any one pair of A and B wires in the terminal block for each of the two ends of the switch mechanism.

Switch Enclosures

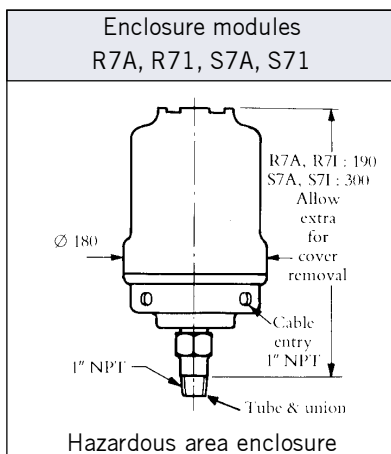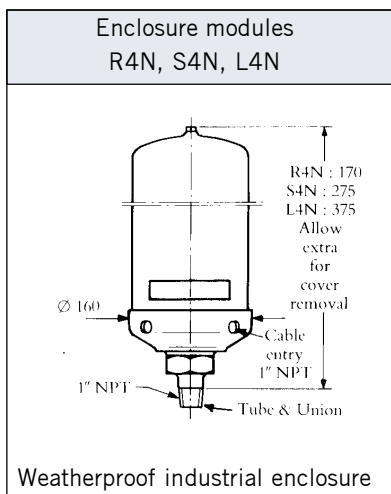

Type D4, D8: General purpose switch mechanism.

Type X4, X8: High current switch mechanism.

Type P4, P8: Switch mechanism with gold plated contacts for use in low power or intrinsically safe circuits.

Type H4, H8: Hermetically sealed mechanism with all moving parts and contacts enclosed in an inert gas filled stainless steel enclosure. Suitable for use in low temperatures, contaminated atmospheres and intrinsically safe circuits.

Electrical Rating

Type	Temp wetside °C	Low temp use	AC max. values			DC max. values			
			VA	Volts	Amps	Watts	Volts	Res amps	Ind amps
D4, D8	400	No	2000	440	5	50	250	5	0.5
X4, X8	250	No	2000	440	10	50	250	10	0.5
P4, P8	400	No	6	250	0.25	3.6	250	0.25	0.1
H4, H8	250	-50°C	2000	440	10	50	250	10	0.5

Each switch mechanism has flying leads which are factory wired to ceramic terminal blocks fixed in the switch enclosure.

Warning

Gold plating on the contacts of P4 and P8 switch mechanisms may be permanently damaged if the mechanisms are used to switch circuits with values greater than those shown above.

Switches must not be used for the direct starting of motors. Contacts should be wired in series with the operating coils of relays, contactor starters or solenoid valves and fused separately.

Weatherproof IEC144: IP66.

Aluminium alloy based/drawn steel cover.

Type R4N: Fixed switch

Type S4N: 100mm switch adjustment

Type L4N: 200mm switch adjustment

Flameproof EExdIICT6 (Weatherproof IP66)

Aluminium alloy base and cover "A"

Cast iron base and cover "I"

Type R7A/R71: Fixed switch

Type S7A/S71: 100mm switch adjustment

Conduit entries

Enclosures supplied with four contact switch mechanisms have a single 1" NPT conduit entry.

Enclosures supplied with eight contact switch mechanisms have 2 x 1" NPT conduit entries.

Users must comply with the approval requirements for connection as detailed in Installation Leaflet IP153.

Tube and Unions: 316 stainless steel throughout. Welded construction with additional swaging technique to ensure maximum integrity. Individually pressure tested to 150 bar (operating pressure will be limited by float or flange specified).

Paint Finish: Black stove paint. Epoxy paint finishes available on request.

1.0 Direct Mount Displacer Conti

Mobrey displacer operated controls are ideal for sump application and other top mounting duties such as low level alarm in deep tanks. Their principle of operation also makes them suitable, in a modified form, for very high pressure or low S.G. applications.

The four most popular displacer arrangements are shown in this schematic diagram, which covers most of the likely applications. However, should you have a different requirement, we would be pleased to quote a model for your particular application.

Principle of Operation

The displacer element, made of either 316 stainless steel or ceramic depending upon duty, is suspended on a stainless steel cable from a spring. The element is always heavier than its equivalent volume of the liquid in which it is to operate, and so will extend the tension spring at all times. In free air, the spring will be extended to a known length, controlled by a mechanical stop to prevent oversteering. Fixed to the spring is the float rod and magnet assembly, free to move up and down as the spring extends or contracts, and outside the pressure tube in the usual manner is the switch mechanism.

As liquid rises to cover the displacer element, a buoyancy force is created equal to the weight of the liquid displaced. This force in effect is seen by the spring as a reduction in weight, causing the spring to

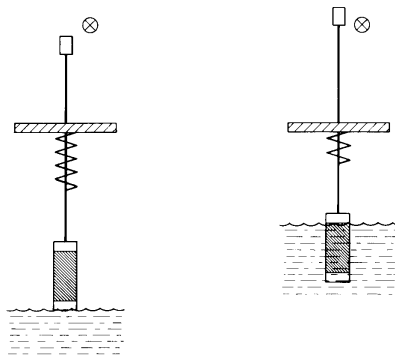


Fig v

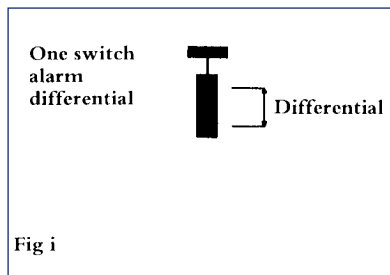


Fig i

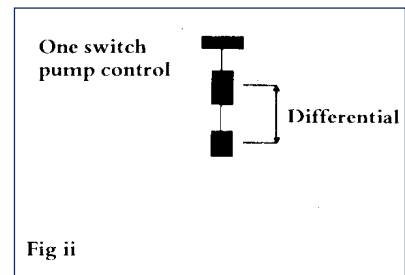


Fig ii

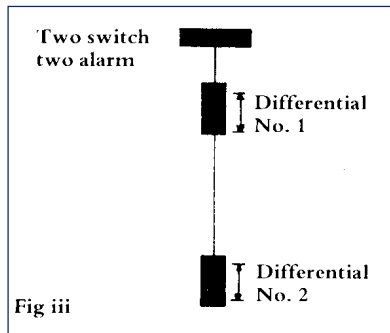


Fig iii

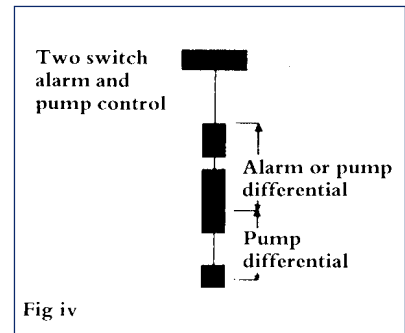


Fig iv

contract, hence moving the magnet upwards inside the pressure tube and actuating the switch mechanism. On a falling liquid level, the displacer element is uncovered and the spring sees an increasing effective weight, causing the spring to extend and move the magnet to re-set the switch mechanism (Fig i and v).

This simple principle can be refined to operate a single switch over a very wide differential by providing the buoyancy force from two elements instead of just one (Fig ii).

Two switch models are available for either two alarm duty with two narrow differentials (Fig iii) or for pump control/alarm duty with appropriate differentials (Fig iv).

In all cases, because the elements are suspended on a cable, switching or control levels can be several metres below the mounting flange, and are fully field adjustable by re-setting the elements on the cable.



Displacer Control

Displacer Controls: Ordering Information

Code	Displacer operated alarm and pump control switches										
D	Direct mount: Displacer controls										
Code	Material of mounting flange										
C	Carbon steel. ASTM A105 (For use +300°C to -10°C)										
S	315L stainless steel. ASTM A182: F316L (For use +300°C to -50°C)										
Code	Displacer function and specification										
	Function	Elements	Material of		S.G. Range		Operating	Max. pres.			
			Trim	Spring	4 Contact	8 Contact	temp. range	20°C			
1D	One switch	316 S.S.	316 Stainless Steel	Nimonic 90	0.6 - 1.2	0.75 - 1.2	-50°C to +300°C	102 bar			
4D	narrow diff.	Ceramic					-50°C to +105°C				
2D	One switch	316 S.S.					0.5 - 1.2		0.75 - 1.2	-50°C to +300°C	
5D	wide diff.	Ceramic					-50°C to +105°C				
3D	Two switch	316 S.S.					0.6 - 1.2		0.8 - 1.2	-50°C to +300°C	
6D	2 wide diff.	Ceramic					-50°C to +105°C				
8D	Two switch	315 S.S.	0.6 - 1.2	0.6 - 1.2	-50°C to +300°C						
9D	2 normal diff.	Ceramic			-50°C to +105°C						
Code	Switch enclosure										
	Duty	Material of		Material of	Switch	Max. no. of switch					
		Base	Cover	wetted parts	adjustment	mechanisms					
S4N	Weather proof IP66	Aluminium alloy*	Drawn steel	316 stainless steel	Adjust switching point by moving displacer elements on cable	2					
S7A	Flameproof	Aluminium alloy*	Aluminium alloy								
S71	EExdIICT6	Cast iron	Cast iron								
* Base material will be cast iron whenever 8 contact switches are specified											
Code	Number of switch mechanisms										
1	Specify 1 for single switch models 1D, 2D, 4D, 5D										
2	Specify 2 for two switch models 3D, 6D, 8D, 9D										
Code	Type of switch mechanism										
	Switch mechanism		Max. wetside	A.C. max. values			D.C. max. values				
	duty		temperature	Volts	Amps	VA	Volts	Res. I	Ind. I	Watts	
	4 Contact: 2 x SPST										
D4	General purpose		300°C	440	5	2000	250	5	0.5	50	
P4	Low power circuits		300°C	250	0.25	6	250	0.25	0.1	3.6	
X4	High power circuits		250°C	440	10	2000	250	10	0.5	50	
H4	Hermetically sealed		250°C	440	10	2000	250	10	0.5	50	
	8 Contact: DPDT										
D8	General purpose		300°C	440	5	2000	250	5	0.5	50	
P8	Low power circuits		300°C	250	0.25	6	250	0.25	0.1	3.6	
X8	High power circuits		250°C	440	10	2000	250	10	0.5	50	
H8	Hermetically sealed		250°C	440	10	2000	250	10	0.5	50	
	/										
Code	Mounting arrangement										
0	1" N.P.T. Thread: 316 stainless steel standard						These are our				
60	3" # 150 R.F. ANSI B16.5/BS1560						stocked flanges.				
61	3" # 300 R.F. ANSI B16.5/BS1560						Other flange				
62	3" # 600 R.F. ANSI B16.5/BS1560						sizes and ratings				
65	4" # 150 R.F. ANSI B16.5/BS1560						are available				
66	4" # 300 R.F. ANSI B16.5/BS1560						on				
67	4" # 600 R.F. ANSI B16.5/BS1560						request.				
D	C	3D	S7A	2	D4	/	60	Typical ordering information			

Note: Customers must state operating pressure, temperature and specific gravity, together with function of each switch mechanism when ordering.


Due to component tolerances, dimensions D, DB, E and S given on page 7 are approximate and may vary on each control by up to 10mm. Setting the control to operate at the required level can be achieved on site by adjusting the element up or down on the cable as necessary.

Displacer types and dimensional details

Single switch narrow differential: 1D, 4D

Specify for alarm duty

Switching level can be changed by simply moving the displacer up or down the cable.

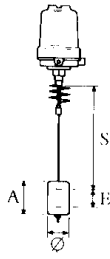

1D St. Steel: A = 216 Ø = 60.3

Switch types	D4	P4	X4	H4	D8	P8	X8	H8
S.G.	0.6	0.75	1.0	1.2	0.75	1.0	1.2	
S min	290	310	340	355	250	295	315	
E	90	70	60	55	135	105	90	

4D ceramic: A = 198 Ø = 65

Switch types	D4	P4	X4	H4	D8	P8	X8	H8
S.G.	0.6	0.75	1.0	1.2	0.75	1.0	1.2	
S min	330	350	380	390	300	335	350	
E	90	70	60	55	135	105	90	


S min = Adjustable distance to upper switching level.

E min = Differential

D = Minimum dead band

Two switch 2 narrow differentials: 8D, 9D

The displacers are positioned to form two elements of similar lengths, such that two alarm points may be given. This arrangement is typical of sump application.



8D St. Steel: A = 216 Ø = 60.3


Switch types	D4	P4	X4	H4	D8	P8	X8	H8
S.G.	0.6	0.8	1.0	1.2	0.8	1.0	1.2	
S min	365	360	350	340	330	325	320	
E min	90	70	60	55	135	105	90	
Dead band	200	230	255	310	165	215	250	

9D ceramic: A = 240 Ø = 65

Switch types	D4	P4	X4	H4	D8	P8	X8	H8
S.G.	0.6	0.8	1.0	1.2	0.8	1.0	1.2	
S min	375	410	400	390	320	340	350	
E min	135	110	90	75	190	160	135	
Dead band	155	190	220	265	130	170	225	

Single switch wide differential: 2D, 5D

The two displacer elements are positioned at any point on the cable to correspond to the switching levels required. When the liquid level drops to the lower displacer the switch is actuated and starts (or stops) a pump; when the liquid rises to the upper displacer the switch is again actuated to stop (or start) the pump.

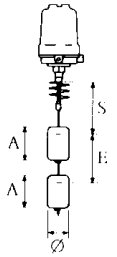

2D St. Steel: A = 216 Ø = 60.3

Switch types	D4	P4	X4	H4	D8	P8	X8	H8
S.G.	0.5	0.8	1.0	1.2	0.75	0.8	1.0	1.2
S min	390	405	405	400	365	365	375	375
E min	165	110	95	80	205	200	165	140


5D Ceramic: A = 145 Ø = 65

Switch types	D4	P4	X4	H4	D8	P8	X8	H8
S.G.	0.5	0.8	1.0	1.2	0.75	0.8	1.0	1.2
S min	330	350	350	350	310	312	320	325
E min	165	110	95	80	205	200	165	140

Two switch 2 wide differentials: 3D, 6D

A pump is controlled between the middle and the lower pump displacers positioned on the cable at the required levels. Should the level rise to the upper displacer this actuates the upper alarm switch which remains actuated until the level drops to the middle displacer.

Alternatively, the upper switch could control a second pump.



3D St. Steel: A = 152 B = 304 Ø = 60.3

Switch types	D4	P4	X4	H4	D8	P8	X8	H8
S.G.	0.6	0.8	1.0	1.2	0.8	1.0	1.2	
S min	365	360	350	340	330	325	320	
E min	135	110	95	80	200	145	140	
Dead band	220	255	285	310	165	215	250	

6D ceramic: A = 145 B = 200+DB Ø = 65

Switch types	D4	P4	X4	H4	D8	P8	X8	H8
S.G.	0.6	0.8	1.0	1.2	0.8	1.0	1.2	
S min	375	410	400	390	320	340	350	
E min	135	110	90	75	190	160	135	
Dead band	155	190	220	265	130	170	225	



Switch mechanisms		Switch enclosures	
4 Contact: D4 P4 X4 H8	8 Contact: D8 P8 X8 H8	Weatherproof: S4N	Flameproof: S7A S7I
<p>2 × independent SPST AA make on rise; BB make on fall</p>	<p>Double pole double throw (4 × independent SPST) AA make on rise; BB make on fall</p>	<p>Weatherproof: S4N Allow extra for cover removal Cable entry 1" NPT Tube & union</p>	<p>Flameproof: S7A S7I Allow extra for cover removal Cable entry 1" NPT Tube & union</p>

2.0 Direct Mounting Float Switches: Ordering Information



Code	Float operated alarm and pump control switches											
D	Direct mount: Float switches											
	Code	Material of mounting flange										
	C	Carbon steel ASTM A105 (for use + 400°C to -10°C)										
	S	316L stainless steel ASTM A182: F316L (for use + 400°C to -100°C)										
	Code	Switch Enclosure										
		Minimum S.G.	Pressure rating (bar)			Float diameter	Matching enclosures	Matching mounting flanges				
			20°C	250°C	400°C							
	1F	0.80	34.5	22.0	20.0	67	All models	3" NB and larger				
	2F	0.75	102.1	83.4	69.0	90		4" NB minimum				
	3F	0.65	51.1	41.7	34.5	88						
	4F	0.54	19.6	12.1	6.5	88						
	Code	Switch Enclosure										
		Duty	Material of base	Material of cover	Material of wetted parts	Switch adjustment	Max. no. of switches					
							4 Contact	8 Contact				
	R4N	Weatherproof	Aluminium	Drawn steel	316 stainless steel	None	1	1				
	S4N	IP66	alloy*	steel		100mm	4	2				
	L4N					200mm	6	3				
	R7A	Flameproof	Aluminium	Aluminium		316 stainless steel	None	1	1			
	S7A	EExdIICT6	alloy*	alloy	100mm		4	2				
	R71				Cast iron		Cast iron	None	1	1		
	S71				Cast iron		Cast iron	100mm	4	2		
	*Base material will be cast iron whenever 8 contact switches specified.											
	Code	Number of switch mechanisms										
	1-6	As required: see max. number allowable in switch enclosure data above										
	Code	Type of switch mechanism										
		Switch mechanism duty	Max. wetside temp.	AC max values			DC max values					
				Volts	Amps	VA	Volts	Res. I	Ind. I	Watts		
		4 contact: 2 x SPST										
	D4	General purpose	400°C	440	5	2000	250	5	0.5	50		
	P4	Low power circuits	400°C	250	0.25	6	250	0.25	0.1	3.6		
	X4	High power circuits	250°C	440	10	2000	250	10	0.5	50		
	H4	Hermetically sealed	250°C	440	10	2000	250	10	0.5	50		
		8 contact: DPDT										
	D8	General purpose	400°C	440	5	2000	250	5	0.5	50		
	P8	Low power circuits	400°C	250	0.25	6	250	0.25	0.1	3.6		
	X8	High power circuits	250°C	440	10	2000	250	10	0.5	50		
	H8	Hermetically sealed	250°C	440	10	2000	250	10	0.5	50		
	Code	Mounting arrangement										
	0	1" NPT thread: 316 stainless steel standard										
	60	3" # 15ORF ANSI B16.5 / BS1560										
	61	3" # 30ORF ANSI B16.5 / BS1560										
	62	3" # 60ORF ANSI B16.5 / BS1560										
	65	4" # 15ORF ANSI B16.5 / BS1560										
	66	4" # 30ORF ANSI B16.5 / BS1560										
	67	4" # 60ORF ANSI B16.5 / BS1560										
		These are our stocked flanges. Other flange sizes and ratings are available on request										
D	C	2F	L4N	4	D4 /	67	Typical ordering information					

Note : Instrument pressure rating is the lower of either the float or mounting flange



Direct Mounting Float Dimensions

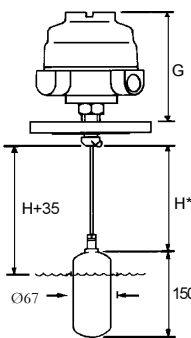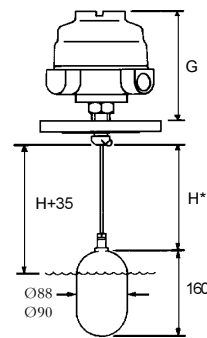Floats for 3" NB mounting: 1F				Floats for 4" NB mounting: 2F, 3F, 4F				
 <p>1F</p>				 <p>3F, 4F, 2F</p>				
*Float rod may be shortened to suit				*Float rod may be shortened to suit				
H dimension when used with:	1F		Switch adjustment	Wet switching differential	2F 3F 4F		Switch adjustment	Wet switching differential
	minH	maxH			min H	max H		
R4N R7A R7I	155	315	None	20mm	155	415	None	20mm
S4N S7A S7I	155	315	100mm	120mm max.	155	415	100mm	120mm max.
L4N					155	415	20mm	220mm max.

Switch Enclosures

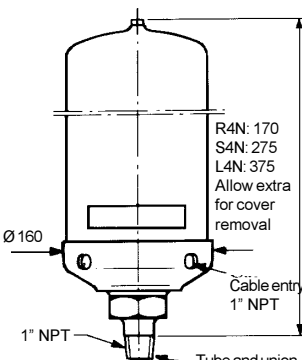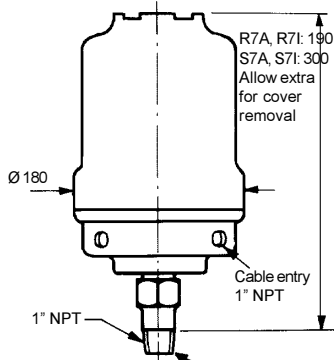Weatherproof: R4N S4N L4N	Flameproof: R7A R7I S7A S7I
 <p>R4N: 170 S4N: 275 L4N: 375 Allow extra for cover removal</p> <p>Ø160</p> <p>1" NPT</p> <p>Cable entry 1" NPT</p> <p>Tube and union</p>	 <p>R7A, R7I: 190 S7A, S7I: 300 Allow extra for cover removal</p> <p>Ø180</p> <p>1" NPT</p> <p>Cable entry 1" NPT</p> <p>Tube and union</p>

Switch Mechanisms

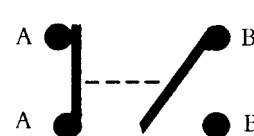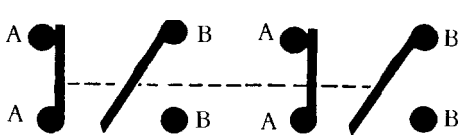4 Contact D4, P4, X4, H4	8 Contact D8, P8, X8, H8
 <p>2 x independent SPST AA make on rise: BB make on fall</p>	 <p>Double pole double throw (4 x independent SPST) AA make on rise: BB make on fall</p>

3.0 Carbon Steel Chamber Mounted Controls: Ordering Information


Code	Chamber mounted controls									
B	Bottle Style: Float sealed inside chamber during manufacture									
X	Flanged Style: Float may be removed from chamber for routine maintenance									
Code	Material of construction of chamber									
C	Carbon steel: See page 15									
Code	Floats									
	Float and trim material	Minimum S.G	Pressure rating (bar). See notes				Chamber body size			
			20°C	250°C	400°C					
1F		0.80	34.5	22.0	20.0	Refer to page 15 for process connection ratings	3" N.B.			
2F	316 stainless steel	0.75	102.1	83.4	69.0					
3F		0.65	51.1	41.7	34.5					
4F		0.54	19.6	12.1	6.5					
7D		0.40	102.1	83.4	69.0	Note: single switch only	4" N.B.			
Code	Switch Enclosure									
	Duty	Material of Base		Cover	Material of wetted parts	Switch adjustment	Max. no. of switches			
							4 Contact	8 Contact		
R4N	Weatherproof IP66	Aluminium alloy*		Drawn steel	316 stainless steel	None	1	1		
S4N						100mm	4	2		
R7A	Flameproof EExdIICT6	Aluminium alloy*		Aluminium alloy	316 stainless steel	None	1	1		
S7A						100mm	4	2		
R71		Cast iron		Cast iron		None	1	1		
S71				100mm	4	2				
* Base material will be cast iron whenever 8 contact switches are specified										
Code	Number of switch mechanisms									
1 - 4	As required: see max. number allowable in switch enclosure and float data above									
Code	Type of switch mechanism									
	Switch mechanism duty		Max. wet side temperature	A.C. max. values			D.C. max. values			
				Volts	Amps	VA	Volts	Res. I	Ind. I	Watts
	4 Contact: 2 x SPST									
D4	General purpose		400°C	440	5	2000	250	5	0.5	50
P4	Low power circuits		400°C	250	0.25	6	250	0.25	0.1	3.6
X4	High power circuits		250°C	440	10	2000	250	10	0.5	50
H4	Hermetically sealed		250°C	440	10	2000	250	10	0.5	50
	8 Contact: DPDT									
D8	General purpose		400°C	440	5	2000	250	5	0.5	50
P8	Low power circuits		400°C	250	0.25	6	250	0.25	0.1	3.6
X8	High power circuits		250°C	440	10	2000	250	10	0.5	50
H8	Hermetically sealed		250°C	440	10	2000	250	10	0.5	50
	/									
Code	Process connection configuration									
1	Side/bottom									
2	Side/side with 1" NPT dram									
Code	Process connection size & rating					Chamber				
01	1" N.P.T.: 316 s/s standard					3" & 4" N.B.	These are our stocked sizes			
11	1" # 150 R.F.									
12	1" # 300 R.F.									
13	1" # 600 R.F.									
15	DN25 PN16									
16	DN25 PN25									
17	DN25 PN40									
18	DN25 PN64									
19	DN25 PN100									
21	1½" # 150 R.F.					4" N.B. only	Instrument pressure rating is the lower of either the float or process flange			
22	1½" # 300 R.F.									
23	1½" # 600 R.F.									
25	DN40 PN16									
31	2" # 150 R.F.									
32	2" # 300 R.F.									
33	2" # 600 R.F.									
35	DN50 PN16									
36	DN50 PN25									
37	DN50 PN40									

X C 4F S7A 2 D4 / 2 10 **Typical ordering information**


Note: State process connection centres when ordering. See page 14 for standard dimensions. Instrument pressure rating is the lower of either the float or the process flange.

Chamber Type and Material of Construction

Carbon steel: Bottle construction BS	Carbon steel: Flanged construction XS
---	--

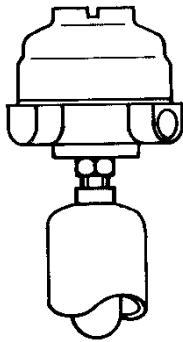



Float is sealed inside chamber during manufacture.

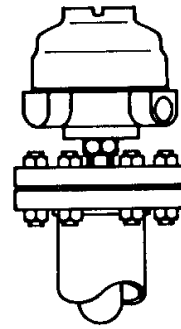

Float may be removed from chamber for routine maintenance, cleaning or inspection.


Switch Enclosures

Weatherproof: R4N S4N	Flameproof: R7A S7A R71 S71
-----------------------	-----------------------------

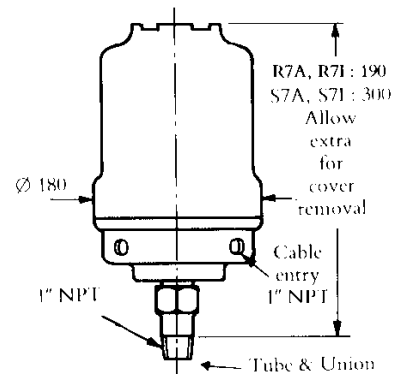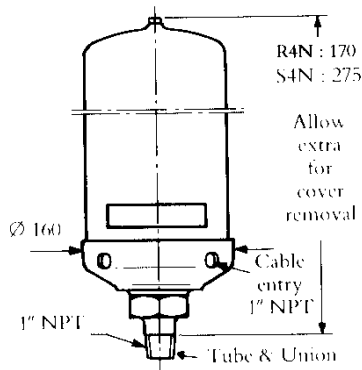


Switch Mechanisms

4 contact: D4 P4 X4 H4	8 contact: D8 P8 X8 H8
------------------------	------------------------

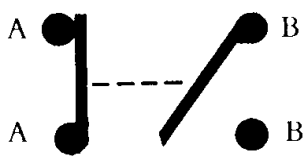



2 x independent SPST
AA make on rise: BB make on fall

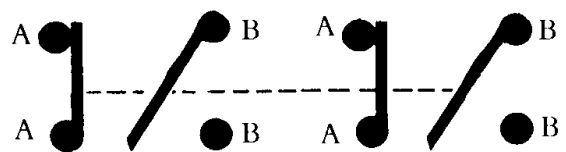

Double pole double throw (4 x independent SPST)
AA make on rise: BB make on fall

Process Connection Configuration

Side and Bottom - 1	Side and Side with Drain - 2
---------------------	------------------------------

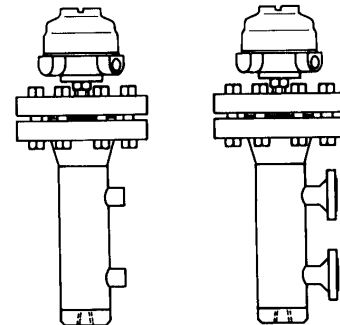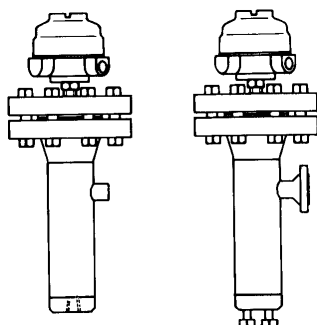

Chamber dimensions, operating levels and technical data are given on page 14


4.0 316L Stainless Steel Chamber Mounted Controls: Ordering Information

Code	Chamber mounted controls										
B	Bottle Style: Float sealed inside chamber during manufacture										
X	Flanged Style: Float may be removed from chamber for routine maintenance										
Code	Material of construction of chamber										
S	316L stainless steel: see page 15										
Code	Floats										
	Float and trim material	Minimum S.G	Pressure rating (bar). See notes				Chamber body size				
			20°C	250°C	400°C						
2F	316 stainless steel	0.75	82.7	57.4	46.3	Refer to page 15 for process connection ratings Note: single switch only	4" N.B.				
3F		0.65	41.4	26.7	23.2						
4F		0.54	15.9	10.2	6.5						
7D		0.40	82.7	57.4	46.3						
Code	Switch Enclosure										
	Duty	Material of		Material of	Switch	Max. no. of switches					
		Base	Cover	wetted parts	adjustment	4 Contact	8 Contact				
R4N	Weatherproof IP66	Aluminium alloy*	Drawn steel	316 stainless steel	None	1	1				
S4N					100mm	4	2				
R7A	Flameproof EExdIICT6	Aluminium alloy*	Aluminium alloy		None	1	1				
S7A					100mm	4	2				
R71		Cast iron	Cast iron	None	1	1					
S71	100mm			4	2						
* Base material will be cast iron whenever 8 contact switches are specified											
Code	Number of switch mechanisms										
1 - 4	As required: see max. number allowable in switch enclosure and float data above										
Code	Type of switch mechanism										
	Switch mechanism duty		Max. wetside temperature	A.C. max. values			D.C. max. values				
				Volts	Amps	VA	Volts	Res. I	Ind. I	Watts	
	4 Contact: 2 x SPST										
D4	General purpose		400°C	440	5	2000	250	5	0.5	50	
P4	Low power circuits		400°C	250	0.25	6	250	0.25	0.1	3.6	
X4	High power circuits		250°C	440	10	2000	250	10	0.5	50	
H4	Hermetically sealed		250°C	440	10	2000	250	10	0.5	50	
	8 Contact: DPDT										
D8	General purpose		400°C	440	5	2000	250	5	0.5	50	
P8	Low power circuits		400°C	250	0.25	6	250	0.25	0.1	3.6	
X8	High power circuits		250°C	440	10	2000	250	10	0.5	50	
H8	Hermetically sealed		250°C	440	10	2000	250	10	0.5	50	
/											
Code	Process connection configuration										
1	Side/bottom										
2	Side/side with 1" NPT dram										
Code	Process connection size & rating										
01	1" N.P.T. 316 stainless steel standard										
11	1" # 150 R.F. ANSI B16.5/BS1560										
12	1" # 300 R.F. ANSI B16.5/BS1560										
13	1" # 600 R.F. ANSI B16.5/BS1560										
21	1½" # 150 R.F. ANSI B16.5/BS1560										
22	1½" # 300 R.F. ANSI B16.5/BS1560										
23	1½" # 600 R.F. ANSI B16.5/BS1560										
31	2" # 150 R.F. ANSI B16.5/BS1560										
32	2" # 300 R.F. ANSI B16.5/BS1560										
33	2" # 600 R.F. ANSI B16.5/BS1560										
B	S	7D	4N	1	X8	/	2	33	Typical ordering information		


Note: State process connection centres when ordering. See page 14 for standard dimensions. Instrument pressure rating is the lower of either the float or the process flange.

Chamber Type and Material of Construction

Carbon steel: Bottle construction BC	Carbon steel: Flanged construction XC
---	--

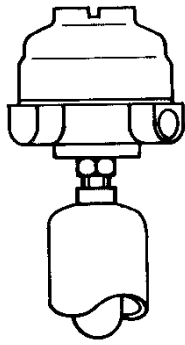



Float is sealed inside chamber during manufacture.

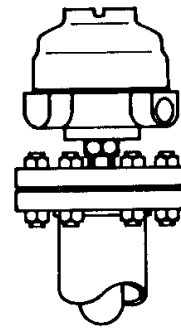

Float may be removed from chamber for routine maintenance, cleaning or inspection.


Switch Enclosures

Weatherproof: R4N S4N	Flameproof: R7A S7A R71 S71
-----------------------	-----------------------------

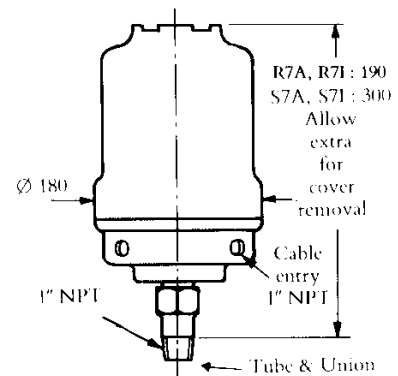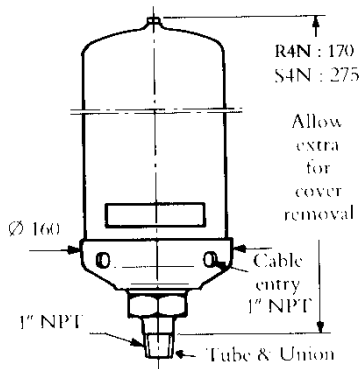


Switch Mechanisms

4 contact: D4 P4 X4 H4	8 contact: D8 P8 X8 H8
------------------------	------------------------

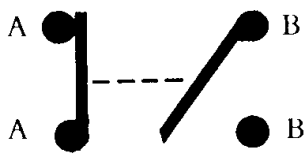



2 × independent SPST
AA make on rise: BB make on fall

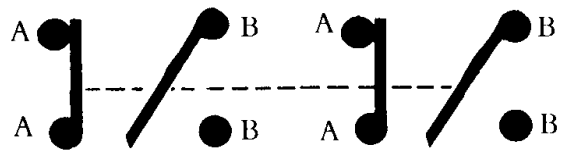

Double pole double throw (4 × independent SPST)
AA make on rise: BB make on fall


Process Connection Configuration

Side and Bottom - 1	Side and Side with Drain - 2
---------------------	------------------------------

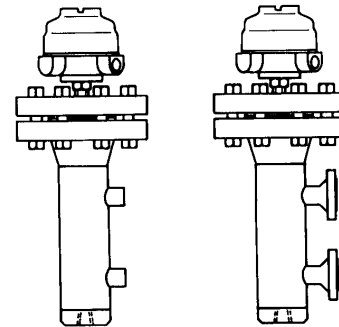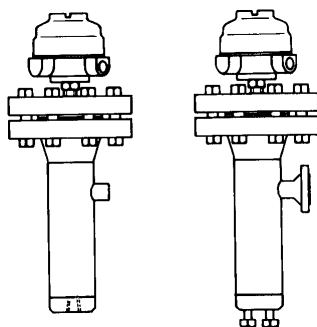

Chamber dimensions, operating levels and technical data are given on page 14

Dimensional and Operating Level Data

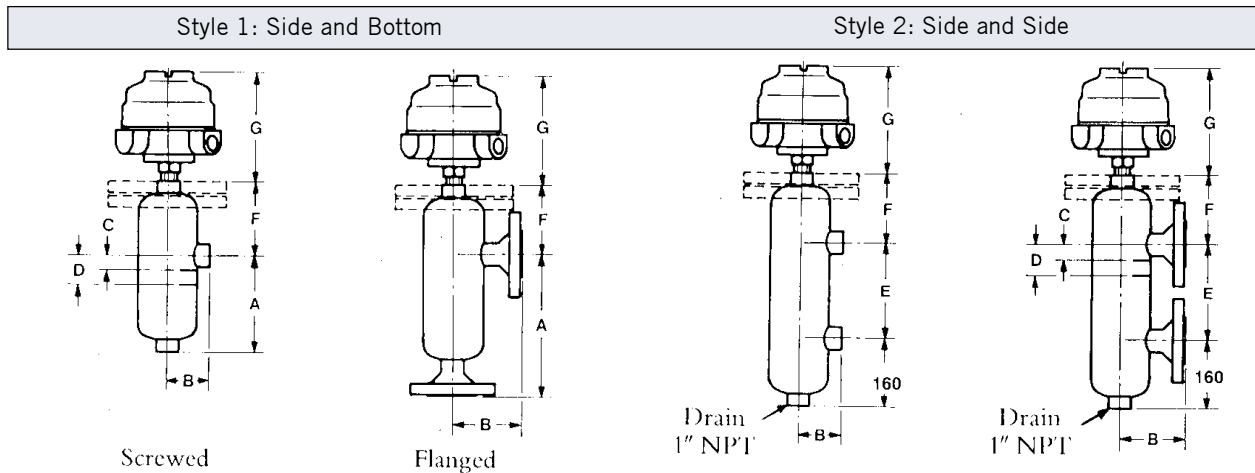

Process connections	A		B*	C	D		E		F	
	Single switch 'R' head	Multi-type 'S' head	Chamber type BC/others		Single switch 'R' head	Multi-switch 'S' head	Single switch 'R' head	Multi-switch 'S' head	Chamber type	
									BC/BS	XC/XS
1" NPT (side/bottom)	300	385	76/95	50	70	155	-	-	48/160	225
1" NPT (side/side)	-	-	95	50	70	155	271	356	160	225
1" 150	356	441	110	50	70	155	271	356	160	225
1" 300	356	441	117	50	70	155	271	356	160	225
1" 600	356	441	123	50	70	155	271	356	160	225
DN25 PN16	356	441	94	50	70	155	271	356	160	225
DN25 PN25	356	441	96	50	70	155	271	356	160	225
DN25 PN40	356	441	96	50	70	155	271	356	160	225
DN25 PN64	356	441	114	50	70	155	271	356	160	225
DN25 PN100	356	441	114	50	70	155	271	356	160	225
1½" 150	356	441	115	50	70	155	271	356	160	225
1½" 300	356	441	121	50	70	155	271	356	160	225
1½" 600	356	441	126	50	70	155	271	356	160	225
DN40 PN16	356	441	97	50	70	155	271	356	160	225
2" 150	356	441	112	50	70	155	271	356	160	225
2" 300	356	441	118	50	70	155	271	356	160	225
2" 600	356	441	129	50	70	155	271	356	160	225
DN50 PN16	356	441	98	50	70	155	271	356	160	225
DN50 PN25	356	441	101	50	70	155	271	356	160	225

B* Dimension given is for 4" NB chamber (2F, 3F, 4F & 7D Floats). For 3" NB chamber (1F Float) subtract 13mm.

Operating levels: Type 7D float in any chamber.

Operating S.G.	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.1	1.2
Dimension C	65	73	82	91	100	109	118	127	136
Dimension D	118	122	127	132	137	141	147	152	156

Notes: C = Highest operating liquid level
 D (Single switch) = Reset level
 D (Multi switch) = Lowest operating liquid level
 D-C = Wet switching differential (max)

All dimensions in mm.

NOTE: Dimensions given are for reference only, and must be certified on order.

Dimensional data: enclosures					
Type	Duty	Height G	Conduit thread*	Switch adjustment	Weatherproof rating
R7A, R71	Flameproof	190	1" NPT	None	IP66 to IEC 144 (NEMA 4)
S7A, S71	EExdIICT6	300		100	
R4N	Weatherproof	170	1" NPT	None	IP66 to IEC 144 (NEMA 4)
S4N		275		100	
L4N		375		200	

*Enclosures for use with 8 contact switch mechanisms have both conduit entries threaded, whilst those for use with 4 contact switch mechanisms have only one conduit entry.

Technical Data

Mobrey vertical level controls are manufactured to the highest standards of quality with only certified materials: BS EN 10204 3.1B. Design of Mobrey chambers is in accordance with ANSI B31.3.

Welding is qualified to ASME IX, BS4870 and BS4871. Circumferential and set-on branch welds are full penetration welds, with visual inspection in accordance with ANSI B31.3 "normal service" requirements and our company standard 417.


All pressure retaining assemblies are hydrostatically pressure tested to a minimum of 1.25 x maximum working pressure or to flange standard requirements.

Radiography or other NDT techniques can be accommodated provided that they are specific at time of order entry.

Inspection

Whilst Mobrey employ inspectors in house, unconnected with production, customers frequently ask for outside inspection. We are happy to accommodate nominated inspectors if agreed at order entry.

Some specifications require a quality control plan detailing inspection points and hold points. Mobrey will produce these QC plans for customer approval if agreed at order entry.

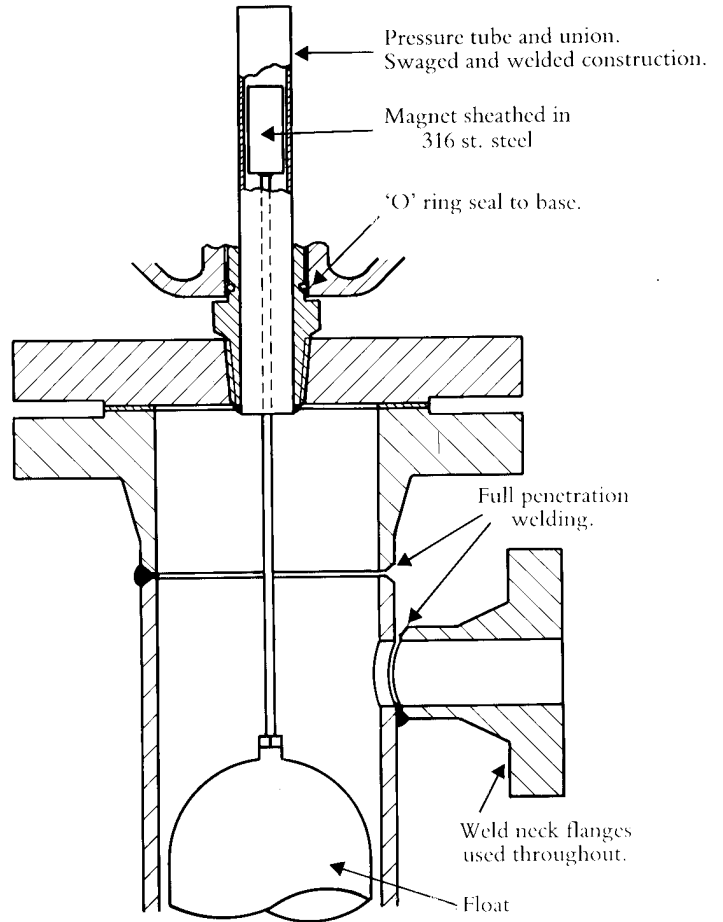

Pressure Ratings (bar)

Material	Carbon steel: A105			Stainless steel: 316L		
	20°C	250°C	400°C	20°C	250°C	400°C
ANSI # 150	19.6	12.1	6.5	15.9	10.2	6.5
ANSI # 300	51.1	41.7	34.5	41.4	26.7	23.2
ANSI # 600	102.1	83.4	69.0	82.7	57.4	46.3
BS4504 PN16	16	14.4	8.8	15.2	9.9	8.4
BS4504 PN25	25	22.5	13.8	23.8	15.5	13.2
BS4504 PN40	40	36	22	38	24.8	21.1


Technical specification

Materials of construction	Carbon steel chamber	Stainless steel chamber
Chamber tube	ASTM A106 Gr B / BS3602 HFS410	ASTM A312 T316L / BS3605-316-S14
Top casting	ASTM A216 / BS1504-161-430A	-
Top/bottom caps	ASTM A105 / BS1503-221-430E	ASTM A182 F316L / BS1503-316-S13
Top cover	ASTM A105 / BS1503-221-430E	ASTM A182 F316L / BS1503-316-S13
Flanges/fittings	ASTM A105 / BS1503-221-430E	ASTM A182 F316L / BS1503-316-S13
Studs	ASTM A193-B7 / BS1506-621A-B7	ASTM A193-B7 / BS1506-621A-B7
Nuts	ASTM A194-2H / BS1506-162-2H	ASTM A192-2H / BS1506-162-2H
Standard chambers +400°C to -10°C. Low temperature chambers below -10°C upon request		


Options

- Low temperature carbon steel
- Cr. mo. steels
- Duplex UNS31803
- Ratings up to ANSI #2500
- N.A.C.E. requirements
- N.D.T. to your specifications
- 3.1b Identifiable certification
- Vent and drain connections
- Process connections to specification


Mobrey "Fit & Forget" Products Provide The Solution To Your Liquid Level Control Problems

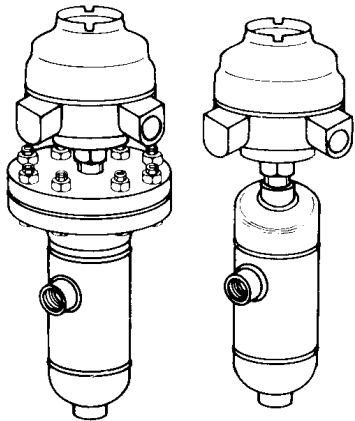

Medium pressures
ANSI Class 150, 300 600
SG 0.4
Pages 10-13

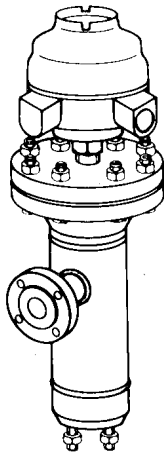

High pressures
ANSI Class 900, 1500, 2500
SG 0.40
To order

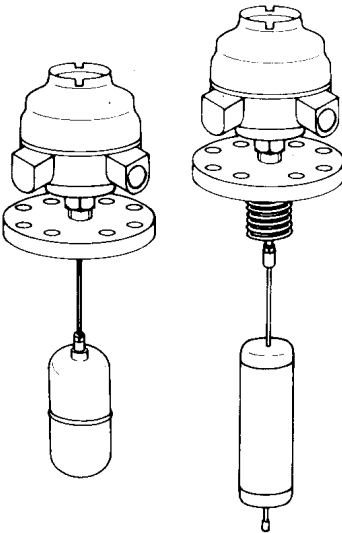

Direct mounting
ANSI Class 150, 300, 600
SG 0.4
Pages 5-9

You Can Rely On Us

The Mobrey range of vertical liquid level controls is designed for operation in a wide variety of applications.

Typical Applications

Separators	Water Sumps
Compressors	Scrubbers
Knock-out Pots	Fractioning Columns
Condensors	Flash Vessels
De-aerators	Process Vessels
Storage Tanks	Condensate Tanks
Service Tanks	Drainpots
Header Tanks	Accumulators
Effluent Sumps & Tanks	Fuel Tanks
Heat Exchangers	Feedwater Heaters
Lude Oil Tanks	Surge Drums

Mobrey level switches are used for the control of liquids by companies all over the world.

Shell	Bechtel
Exxon	Bellili
Amoco	Ontario Hydro
Fluos	Nissaei-Sangyo
Hyundai	Foster Wheeler
British Petroleum	Siemens
Mobil	Mannesmann-Demag
Texaco	Catalytic
Ingersoll Rand	Techni
Compair	Technipetrol
Honeywell	Nuovo Pignone
Wemco	Dresser

Solartron Mobrey Limited
158 Edinburgh Avenue Slough Berks England SL1 4UE
Tel: 01753 756600 Fax: 01753 823589
e-mail: sales@solartron.com www.solartron.com
a Roxboro Group Company

Bestobell Mobrey GmbH	Deutschland	tel: 0211/99 808-0
Solartron Mobrey Ltd	China	tel: 021 6353 5652
Mobrey sp z o o	Polska	tel: 022 871 7865
Mobrey AB	Sverige	tel: 08-725 01 00
Mobrey SA	France	tel: 01.34.30.28.30
Mobrey SA-NV	Belgium	tel: 02/465 3879
Solartron Mobrey	USA	tel: (281) 398 7890



The right is reserved to amend details given in this publication without notice